



savings
up **90%**

long
lifespan

ecology

NEW GENERATION LUMINAIRE FROM TESLA


TESLA LED TRI-PROOF LUMINAIRE

Simple and efficient

CE   IP65





Fresh design of industry LED luminaires TESLA Tri-Proof is applicable in all areas where luminaire ruggedness is required. IP65 offers required protection against dust and humidity. Unique heatsink design guarantee long lifetime of 50.000 hours. Simply TESLA quality.



TESLA LED TRI-PROOF LUMINAIRE

CATALOG NUMBER	POWER	LENGTH	LUMINOUS FLUX	BEAM ANGLE	COLOR TEMPERATURE	LIFESPAN	CRI	WORKING TEMPERATURE	VOLTAGE	POWER FACTOR	IP	WEIGHT
TP122040-2F	20W	1220mm	1650lm	120°	4000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	2,40kg
TP122050-2F	20W	1220mm	1800lm	120°	5000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	2,40kg
TP124040-2F	40W	1220mm	3490lm	120°	4000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	2,40kg
TP124050-2F	40W	1220mm	3600lm	120°	5000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	2,40kg
TP153540-2F	35W	1560mm	3000lm	120°	4000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	3,12kg
TP153550-2F	35W	1560mm	3150lm	120°	5000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	3,12kg
TP155540-2F	55W	1560mm	4710lm	120°	4000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	3,12kg
TP155550-2F	55W	1560mm	4950lm	120°	5000K	50 000h	≥80	-20°C - +40°C	230V	>0.95	IP 65	3,12kg

Dimensions

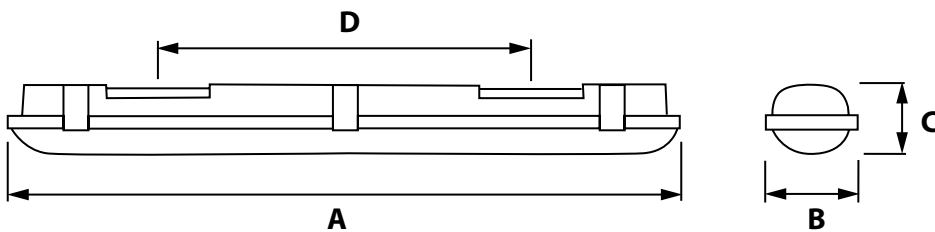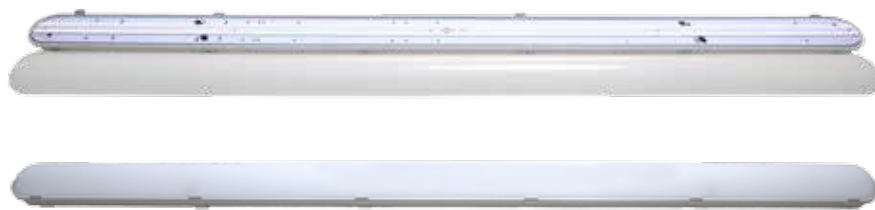

- A = length 1220/1560 mm
- B = width of 90 mm
- C = height 68 mm
- D = the distance of the mounting points 770/110 mm

Packaging

- 1pc boxes

Features

- Polycarbonate body with installed PCB
- Polycarbonate frosted cover
- IP65 protection class
- Good heat management
- Lifetime up to 50.000 hours
- No toxic substances included

Applications

- Tunnels, manufacturing and warehouse operations, building constructions, public spaces, train and bus terminals, parking garages

Energy efficiency

